

X-TREME® TEX-CAP

Tex-Trude X-TREME Tex-Cap is a high performance modified PVC Joint Cap, manufactured with advanced flexible virgin resins. X-TREME Tex-Cap is designed to be installed over expansion board materials, to form a mechanical bond, help stop water and other contaminants from migrating through the joint.

ADVANTAGES ›

Compared to traditional joint-sealing materials:

- › Longer Product Life: typically 10 to 15 years.
Other joint materials, 1 to 3 years
- › Mechanical Bond, 99 percent less failure,
maintenance free
- › Lower Cost per liner foot
- › Install at all temperatures
- › Installed prior to concrete pour, no second mobilization
- › Expands and contracts with the concrete
- › Abrasion resistant
- › Appearance: Aesthetically nice, smooth, and clean joint



INSTALLATION ›

Install X-TREME Tex-Cap over the expansion board with a snug fit prior to pouring the concrete. Position the expansion board 1/4 inch below the top of the slab. Install the X-TREME Tex-Cap over the secured expansion board by using staples under the bottom flange, which will aid holding the X-TREME Tex-Cap in place during the concrete pour. Some expansion boards may need additional support. Seal the end of the X-TREME Tex-Cap using industry standard methods.

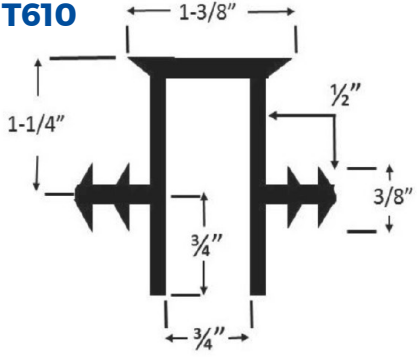
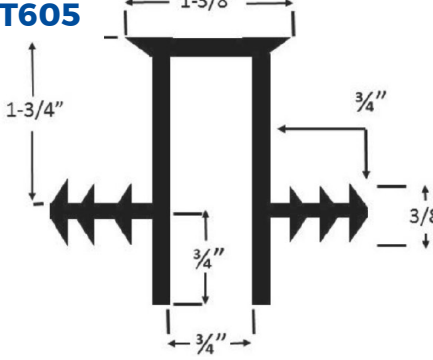
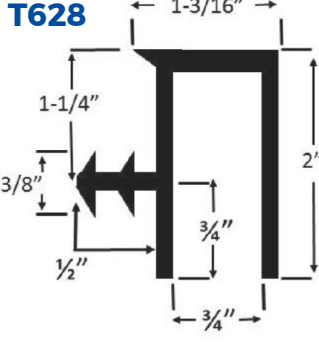
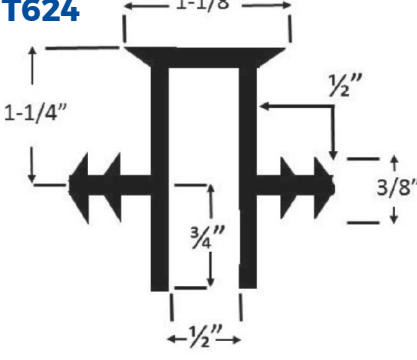
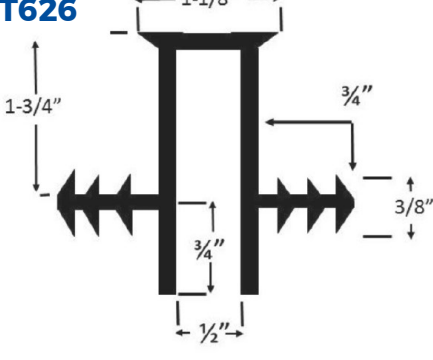
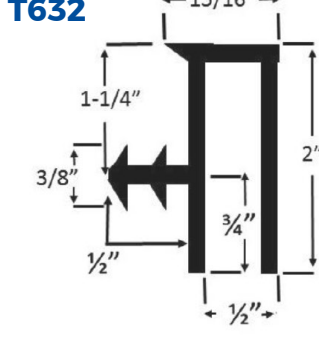
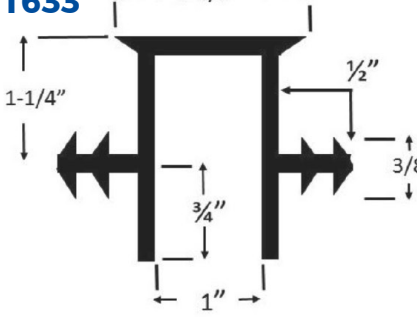
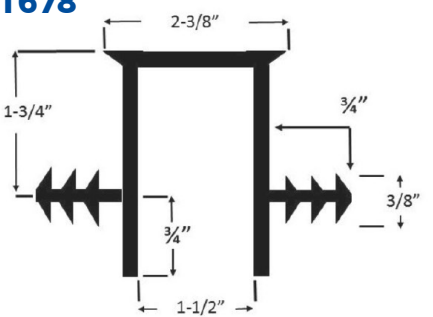
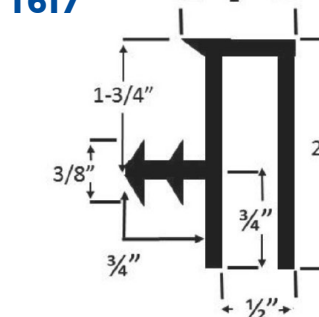
TECHNICAL DATA ›

	ASTM	TEX-CAP
Tensile Strength	ASTM D412	2142
Elongation	ASTM D412-92	377
Abrasion Resistance	ASTM D3884	Weight grams -0.014
Ozone Resistance, 300pphm, 70 hrs. @ 104°F	ASTM D1149	No Cracking Observation made @ 7x magnification
Oil Swell, Volume/Weight	ASTM D471	Volume -6.15% Weight -4.33%
Heat Aging	ASTM D573	280 min
Durometer Hardness	ASTM D2240	83
Results after Heat Aging 24 hrs. @ 70°C	ASTM D573	Tensile Strength Retained: 95.9% min. Elongation Retained: 94.5% min. Hardness Change: 83, no change

LIMITED WARRANTY ›

Tex-Trude warrants this product to meet the published specifications and to be free of defects in workmanship and materials at the time of shipment from our factory. If any X-TREME material proves to contain manufacture defects that substantially affect the performance, then Tex-Trude will at their option replace the material or refund the purchase price. This limited warranty is the only warranty offered by Tex-Trude, LP as it relates to X-TREME products. There are no other warranties, including the implied warranties of merchantability or fitness for a particular purpose. Tex-Trude specifically disclaims liability for any incidental, consequential, or other damages.

X-TREME TEX-CAP PROFILES ›

<p>T610</p>  <p>PACKAGING: 50 foot rolls, 30 rolls per pallet</p>	<p>T605</p>  <p>PACKAGING: 50 foot rolls, 20 rolls per pallet</p>	<p>T628</p>  <p>PACKAGING: 50 foot rolls, 30 rolls per pallet</p>
<p>T624</p> 	<p>T626</p> 	<p>T632</p> 
<p>T633</p> 	<p>T678</p> 	<p>T617</p> 



For more than 20 years, X-TREME® Vapor Barriers from Tex-Trude have set the industry standards for durability, dependability and life-cycle superiority.

Chris Hirsekorn
X-TREME Vapor Barrier
Sales Leads

☎ 713.481.3430 / 832.594.4848
✉ chirsekorn@tex-trude.com

Amanda Solis
X-TREME Vapor Barrier
Customer Service

☎ 713.481.3415
✉ asolis@tex-trude.com

Amy McNair
X-TREME Vapor Barrier
Specifications

☎ 713.481.3442
✉ amcnair@tex-trude.com